

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



PATENT
3011-1002

IN THE U.S. PATENT AND TRADEMARK OFFICE

In re application of

Raul MONTANANA

Application No. 10/776,218

Filed February 12, 2004

POSITIVE ENGAGEMENT CLUTCH

CLAIM TO PRIORITY

Assistant Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

April 19, 2004

Sir:

Applicant(s) herewith claim(s) the benefit of the priority filing date of the following application(s) for the above-entitled U.S. application under the provisions of 35 U.S.C. § 119 and 37 C.F.R. § 1.55:

<u>Country</u>	<u>Application No.</u>	<u>Filed</u>
GREAT BRITAIN	0303128.3	February 12, 2003

Certified copy(ies) of the above-noted application(s) is(are) attached hereto.


Respectfully submitted,

YOUNG & THOMPSON

Robert J. Patch, Reg. No. 17,355
745 South 23rd Street
Arlington, VA 22202
Telephone (703) 521-2297
Telefax (703) 685-0573
(703) 979-4709

RJP/psf

Attachment(s): 1 Certified Copy(ies)





INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed 

Dated 12 February 2004





12 FEB 03 E784265-2 002896
P01/7700 0.00 0303128.3

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

MRH.P04773GB

2. Patent application number

(The Patent Office will fill in this part)

0303128.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

SAMAR Systems Limited
60 Newland Street
Coleford
GL16 8AL

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

7890684001

4. Title of the invention

ROTARY COUPLING

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marks & Clerk
27 Imperial Square
Cheltenham
GL50 1RQ

Patents ADP number (if you know it)

18014

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

GB

0300758.0

14th January 2003

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

19

Claim(s)

6

Abstract

1

Drawing(s)

5 15

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

23/m

11.

I/We request the grant of a patent on the basis of this application.

Signature

M R Higgins

Date

Marks & Clerk

11th February 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr M R Higgins
01242 524520

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

ROTARY COUPLING

This invention relates to a rotary coupling having selectively positionable coupling members.

5

Rotary couplings are known, such as from GB 2343923 which utilises coupling members carried by a driving part and seated in recesses on a driven part. A driving torque can thus be transmitted from the driving part to the driven part through the coupling members, but the application of a reverse torque, i.e. where a torque is applied externally to the driven part of the coupling causing the driven part to attempt to drive the driving part, such as in a runaway condition, causes the coupling members to move or tilt relative to their recesses, thereby engaging a fixed braking surface on the rotary coupling and locking it up.

10

15

However, there are times when it is necessary to be able to allow transmission of a reverse torque. For example, it is a requirement that motorised wheel-chairs be capable of having a free-wheel state, i.e. where the application of a reverse torque is permitted without locking the rotary coupling, as well as a motor-driven state. Obviously, use of the above-mentioned known rotary coupling prevents the wheel-chair ever assuming a dangerous runaway condition, but also fails to provide for the required free-wheel state.

20

A further problem is apparent in battery operated drive systems, for example in stairlifts, where it is a requirement to have a battery-operated emergency back-up

system, in electric vehicles, such as golf carts, and in gravity-assisted doors, such as fire-doors. These drive systems commonly utilise worm-drive gearbox arrangements due to their inherent ability to prevent or inhibit the transmission of reverse torque (i.e. back-driving). However, it is well-known that worm-drive gearbox arrangements are extremely inefficient, generally in the order of 70%. As a consequence, bigger or more battery packs are required to enable longer running times, which itself leads to increased weight and reduced space problems.

It is known that reduction-type gearbox arrangements are far more efficient than worm-drive gearbox arrangements. However, reduction gearbox arrangements have a much reduced ability to inhibit back-driving, and are thus generally not preferred.

Yet another problem is apparent in clutch arrangements. Friction-plate clutch arrangements are in common-use, but the plates tend to wear causing unreliable torque transmission, and the magnitude of torque which can be transmitted before breakage is limited. Furthermore, feedback to an operator through a friction clutch is, at best, limited. Generally, the only feedback an operator will notice when using a friction clutch is if the clutch is slipping.

The present invention seeks to overcome these problems.

According to a first aspect of the present invention, there is provided a positive engagement clutch having a torque input side and a torque output side, the clutch

comprising a torque input member arranged on the torque input side, a torque output member arranged on the torque output side, first engagement members, second engagement members, and an actuator, the torque input member and the torque output member being arranged concentrically to rotate on a common axis, one of the torque input member and the torque output member carrying the first engagement members, and the other of the torque input member and the torque output member carrying the second engagement members, the first engagement members being radially movable by the actuator between a projecting and a retracted position, and the second engagement members projecting radially into a gap between the torque input member and the torque output member, the first and second engagement members engaging with each other, when the first engagement members are in the projecting position, to progressively engage the torque input and output members to allow the transmission of torque to the torque output side, and the first and second engagement members being disengaged from each other, when the first engagement members are in the retracted position, to prevent the transmission of torque to the torque output side.

Preferable and/or optional features of the present invention are set forth in claims 2 to 7, inclusive.

According to a second aspect of the present invention, there is provided a rotary coupling comprising a driving part, a drivable part, a fixed part in which the driving and drivable parts are each rotatable coaxially, and a set of coupling members carried by one of the driving and drivable parts for torque-transmitting engagement with the other, the coupling members being selectively positionable so that, in a first

condition, the coupling members are juxtaposed to a primary annular contact surface of either the fixed part or the drivable part and, in a second condition, the coupling members are juxtaposed to a secondary annular contact surface of the driving part, each coupling member being free to move relative to the driving and drivable parts into and out of engagement with the primary and secondary annular contact surfaces, the arrangement being such that, when the coupling members are in the first condition, the application of a first torque on the coupling members causes the coupling members to engage the primary annular contact surface and, when the coupling members are in the second condition, the application of a second torque on the coupling members causes the coupling members to engage the secondary annular contact surface.

Preferable and/or optional features of the present invention are set forth in claims 9 to 20, inclusive.

According to a third aspect of the present invention, there is provided a rotary coupling in accordance with the second aspect of the invention, in combination with a motorised wheel-chair.

According to a fourth aspect of the present invention, there is provided a rotary coupling in accordance with the second aspect of the invention, in combination with a gravity-assisted door.

According to a fifth aspect of the present invention, there is provided a rotary

coupling in accordance with the second, third or fourth aspect of the invention, in combination with a positive engagement clutch.

5 The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein :

Figure 1 is a partial longitudinal cross-section of one embodiment of a rotary coupling, in accordance with the second, third and fifth aspects of the present invention, and a positive engagement clutch in accordance with the first and fifth
10 aspects of the present invention, both in a first condition.

Figure 2 is a view similar to Figure 1, but showing the rotary coupling and the positive engagement clutch both in a second condition;

15 Figure 3 is a transverse sectional view taken along the line A-A in Figure 1;

Figure 4 is a transverse sectional view taken along the line B-B in Figure 1;

Figure 5 is a transverse sectional view taken along the line B-B in Figure 2;

20 and

Figure 6 is an elevational view of the right-hand end of the rotary coupling shown in Figure 1.

Referring to the drawings, there is shown a rotary coupling 10 adapted for use as part of a wheel-chair. The rotary coupling 10 comprises a driving part 12, a drivable part 14 and a fixed part 16. The driving part 12 and the drivable part 14 are mounted to be rotatable coaxially within the fixed part 16. The fixed part 16 is a body
5 having an external fastening flange 18 for attachment to a suitable chassis 20 and a stepped cylindrical bore 22 forming an interior shoulder 24. One end of the body is closed by a first end housing 26, and the other by a second end housing 28. The body of the fixed part 16 and its two end housings 26 and 28 are secured together by suitable fastening means, such as screw-threaded fasteners 30.

10

The driving part 12 of the coupling 10 comprises a hollow stepped driving shaft 32, or input shaft, having a projecting portion 34 which projects from the first end housing 26, coaxially with the fixed part body, and which is torque disengagably coupled to a reduction gearbox 36. The first end housing 26 includes bearings 38
15 positioned in spaced relationship, and typically a gasket (not shown) situated adjacent the opening 42 of the first end housing 26. The driving shaft 32 is directly supported by the bearings 38 and projects through the gasket, which provides a fluid-tight seal around the outer circumference of the driving shaft 32.

20

The driving part 12 is completed by a planet carrier 44, which projects from the end of the driving shaft 32 opposite the projecting portion 34, and an annular contact member 46 which is in the form of a coaxial ring concentrically arranged with and around the planet carrier 44 and fastened to the driving shaft 32 using screw-threaded fasteners 48. The planet carrier 44 projects axially beyond the annular

contact member 46, for reasons which will become apparent hereinafter. The annular contact member 46 is positioned in the larger diameter portion 50 of the stepped bore 22, directly adjacent to the interior shoulder 24 of the fixed part 16, and has an interior diameter equal, or substantially equal, to the smaller diameter portion 52 of the stepped bore 22 of the fixed part 16.

The planet carrier 44 takes the form of an integral annular ring which is coaxial with the driving shaft 32 and which is interrupted by a number of axially elongate U-shaped (when viewed in plan) seatings 54, each having two generally opposed arcuate thrust surfaces 56. The outer perimeter of the planet carrier 44 lies radially inside the annular contact member 46 of the driving part 12 and the smaller diameter portion 52 of the axial stepped bore 22 of the body of the fixed part 16. The interior surface 58 of the smaller diameter portion 52 of the fixed part 16 constitutes a primary annular contact surface, or braking surface 60, and the interior surface 58 of the annular contact member 46 constitutes a secondary annular contact surface 62. The U-shaped seatings 54 are sufficiently elongate to lie in transverse planes containing the primary braking surface 60 of the fixed part 16 and the secondary annular contact surface 62 of the driving part 12.

The drivable part 14 comprises a drivable shaft 64, or output shaft, having a projecting portion 66 on which a ground engaging wheel 68 is received, the wheel 68 being angularly fixed relative to the drivable shaft 64. The drivable shaft 64 extends through the second end housing 28 and coaxially with the cylindrical body of the fixed part 16 and the driving shaft 32 of the driving part 12. The second end housing 28,

similarly to the first end housing 26, includes a bearing 70 and a gasket 72 situated adjacent the opening 74 of the second end housing 28. The drivable shaft 64 is directly supported by the bearing 70 and projects through the gasket 72, which provides a fluid-tight seal around the circumference of the drivable shaft 64.

5

The drivable part 14 further comprises a collar 76 which is coaxially aligned with the driving and drivable shafts 32 and 64 and which is keyed to the end of the drivable shaft 64 positioned within the fixed part 16. The planet carrier 44 surrounds the collar 76, and the collar 76 includes shallow curved, or concave, recesses 78 which are open towards the corresponding U-shaped seatings 54 of the planet carrier 44. As best seen in Figure 3, the concave recesses 78, when viewed in transverse cross-section, have a part-sinusoidal shape.

10

The keying of the collar 76 to the drivable shaft 64 prevents angular displacement of the collar 76 relative to the drivable shaft 64, but allows the collar 76 to slide axially along the drivable shaft 64 to a first position where the concave recesses 78 lie in, or substantially in, the same transverse plane as the primary braking surface 60 of the fixed part 16, and to a second position where the concave recesses 78 lie in, or substantially in, the same transverse plane as the secondary annular contact surface 62.

15

20

An end-cap 80 is screw-threadably fastened to one end of the collar 76 to form a receptacle in which the end of the drivable part 14 can slide. The end-cap 80 includes a screw-threaded opening 82 coaxially aligned with the rotational axes of the

driving and drivable parts 12 and 14.

The collar 76 is integrally formed with a circumferentially extending shoulder 84 which borders the sides of the concave recesses 78 closest to the end-cap 80. A
5 separate retaining ring 86, held in place by a retaining clip 88 engaged with the collar 76, borders the other side of the concave recesses 78.

The stepped bore of the hollow driving shaft 32, adjacent the planet carrier 44, is dimensioned to enable the collar 76 to be slidably receivable, along the rotational
10 axis 94 of the rotary coupling 10, in the hollow driving shaft 32 to the said first position and the said second position. At the first position, the end-cap 80 abuts, or substantially abuts, the end face of the drivable shaft 64; and in the second position, the collar shoulder 84 abuts, or substantially abuts, the end face of the driving shaft 32.

15

The driving and drivable parts 12 and 14 are coupled together by means of a set of independent coupling members 90. These are arranged in a planetary array around the collar 76, seated in the concave recesses 78 and limited in axial movement, relative to the collar 76, by the collar shoulder 84 on one side and the retaining ring
20 86 on the other. Each coupling member 90 projects radially from its concave recess 78 and is received in a respective one of the said elongate U-shaped seatings 54 of the planet carrier 44.

Each coupling member 90 is in the form of a truncated cylinder (see Figure 3)

with a cylinder axis 92 parallel to the rotational axis 94 of the rotary coupling 10. The truncation of the cylinder defines a wedging surface 96 which faces radially outwards. Each wedging surface 96 is of arcuate cross-section, with a slightly smaller radius than the primary braking surface 60 of the fixed part 16 and the secondary annular contact surface 62 of the driving part 12.

It should be noted that the cylinder axis 92 of each coupling member 90 lies on a pitch circle which is intermediate the inner and outer perimeters of the planet carrier 44.

10

Each coupling member 90 includes an opening 98 formed at its base symmetrically in the face facing the collar shoulder 84. In this case, the opening 98 is a recess, but it may equally be a through-hole. A pin element 100 projects, in parallel or substantially in parallel with the rotational axis 94 of the coupling 10, from the collar shoulder 84 and engages the coupling member 90 through the opening 98. The pin element 100 is a close fit in the coupling member opening 98, but is spaced from the surface of the concave recess 78.

A lever mechanism comprises a manual lever 102, pivotably mounted to an exterior surface of the reduction gearbox 36, and an elongate push-rod actuating element 104 coupled to the lever 102. The push-rod element 104 extends, via a fluid-tight gasket 106, through the reduction gearbox 36 and coaxially along the bore 108 of the hollow driving shaft 32. The end of the push-rod element 104, received in the rotary coupling 10, is screw-threadingly engaged with the screw-threaded opening 82

of the end-cap 80 fastened to the collar 76.

The input side of the reduction gearbox 36 is directly coupled to a suitable battery-operated motor 110, and the gearbox 36 has a pinion gear 112 and crown gear 114 arrangement. The pinion gear 112 is directly driven by the motor 110, and the crown gear 114 is coaxially and concentrically mounted on the projecting end of the driving shaft 32 of the rotary coupling 10.

A positive engagement clutch is used to torque transmittingly engage and disengage the reduction gearbox 36, being the torque input side of the positive clutch, and the rotary coupling 10, being the torque output side.

The positive clutch has a torque input member, being the crown wheel 114 of the reduction gearbox 36, and a torque output member, being the driving shaft 32 of the rotary coupling 10. The positive clutch also includes first engagement members which are in the form of first ball-bearings 116 and which are seated in equi-angularly spaced apertures 118 around the driving shaft 32, adjacent to its projecting end, and second engagement members which are in the form of second ball-bearings 120 and which are seated in equi-angularly spaced apertures 114a formed in the crown gear 114. The first ball-bearings 116 are free to independently move radially relative to the driving shaft 32, but are restricted from moving circumferentially by the apertures 118.

The crown gear 114 includes a retaining ring 114b fixed relative to the

apertures 114a via screw-threaded elements 114c. See Figures 4 and 5. The retaining ring 114b covers the apertures 114a, so that the second ball-bearings 120 can bear against the internal surface 114b' of the retaining ring 114b. The second ball-bearings 120 are independent of each other and project radially inwards into a gap 126 (see
5 Figures 4 and 5) between the crown wheel 114 and the driving shaft 32. The second ball-bearings 120 are prevented from moving radially outwards by the retaining ring 114b and circumferentially by the apertures 114a.

The push-rod element 104 of the lever mechanism includes a frusto-conical
10 portion 122 along which the first ball-bearings 116 ride. With the push-rod element 104 in an axially extended condition, each first ball-bearing 116 projects radially inwards from the driving shaft 32 and does not project radially beyond the outer edge of its aperture 118. As a consequence, when the crown gear 114 rotates, there is no wedging engagement between the first and second ball-bearings 116 and 120.
15 However, with the push-rod element 104 in an axially inserted condition, the first ball-bearings 116 are positioned up the inclined surface of the frusto-conical portion 122 and are thus urged radially outwards towards the crown gear 114 into positive, and therefore torque transmitting, engagement with the radially inwardly projecting second ball-bearings 120.

20

Referring to Figure 1, in normal operation, when it is required to prevent a runaway condition occurring, the lever 102 of the lever mechanism is operated to move the push-rod element 104 axially inwards to its inserted condition. This movement causes the collar 76 to take up the first position so that the wedging

surfaces 96 of the coupling members 90 are juxtaposed to the primary braking surface 60 of the fixed part 16.

The inwards axial movement of the push-rod element 104 has the additional effect of torque engaging the driving shaft 32 with the crown gear 114 of the reduction gearbox 36 through the positive engagement clutch. As the crown gear 114 rotates, the radially inwardly projecting second ball-bearings 120 move into contact with and thus engage the radially outwardly projecting first ball-bearings 116. This engagement causes each first ball-bearing 116 to be progressively urged against the push-rod element 104 and a side or sides of its aperture 118 by the abutting second ball-bearing 120, and each second ball-bearing 120 to be progressively urged against the braking ring 114b and a side or sides of its aperture 114a by the abutting first ball-bearing 116. Positive torque-transmitting engagement is thus achieved between the crown gear 114 and the driving shaft 32.

The progressive engagement between the first and second ball-bearings 116 and 120 is caused, at least in part, by the slight rolling of the first and second ball-bearings 116 and 120 as they contact and are urged against each other prior to their full wedging engagement as the crown wheel 114 engages with the driving shaft 32.

When the motor 110 is now operated, the driving shaft 32 is driven through the reduction gearbox 36 and the positive clutch, and torque is transmitted to the drivable shaft 64 through the appropriate thrust surfaces 56 (depending on the direction of rotation) of the U-shaped seatings 54 of the planet carrier 44 and the

coupling members 90. The engagement between the thrust surfaces 56 and the coupling members 90 result in a generally tangential thrust in a radial zone (generally defined by the thrust surface 56), and this thrust is close to, and/or passes through, the cylinder axis 92 of each coupling member 90. As best seen in Figure 3, the thrust surfaces 56 may be shaped to lie at an angle to the coupling members 90. This enables point contact between the thrust surfaces 56 and the respective coupling members 90. This point contact allows orientation of the thrust imparted by the thrust surfaces 56 to the coupling members 90 to be controlled and thus improve the performance of the rotary coupling 10.

The application of the said thrust causes the coupling members 90 to project radially inwards from the planet carrier 44 to engage, in another radial zone, the concave recesses 78 of the collar 76, thereby transmitting the torque to the drivable part 14 and rotating the wheel 68.

Referring to Figure 3, the part-sinusoidal shape of each concave recess 78 is such that the base portion 130 of the recess 78 has a radius which matches, or substantially matches, the radius of the bottom surface 132 of the respective coupling member 90. The portions 134 of the surface of the recess 78 adjacent the base portion 132 present cam forms which, in this case, act to improve engagement of the coupling member 90 with the recess 78.

In a normal stationary configuration, i.e. when the reduction gearbox 36 is engaged via the positive clutch but the motor 110 is not driving, each coupling

member 90 lies in a generally radially symmetrical attitude in its U-shaped seating 54, and the wedging surfaces 96 of the coupling members 90 are out of contact with the braking surface 60 of the fixed part 16.

5 The pin element 100, acting in conjunction with the corresponding opening 98, helps the coupling member 90 retain its generally radially symmetrical attitude during normal operation of the rotary coupling 10.

10 If a net reverse torque is applied (for example, in a runaway condition) externally to the drivable part 14 of the rotary coupling 10 through the wheel 68, this reverse torque is transmitted to the coupling members 90 through the concave recesses 78 of the collar 76. The radial engagement zone of the coupling members 90 with the drivable part 14 is substantially further from the cylinder axis 92 than the radial zone in which the forward thrust is applied by the thrust surface 56 in the normal driving
15 mode. A turning moment is therefore applied to the coupling members 90 by the concave recesses 78. As the coupling members 90 move in a circumferential direction along the base portion 130 and the cam-form surface portions 134, this induces movement about the cylinder axes 92, which are therefore moment axes, and the coupling members 90 ride up one or other thrust surface 56 (depending on the
20 direction of rotation of the coupling) towards the braking surface 60 of the fixed part 16.

 The pin element 100 in conjunction with the opening 98 aid in providing a positive and progressive movement and rotation of the coupling member 90 along the

base portion 130 and the cam-form surface portions 134. As each coupling member 90 continues to rotate and ride up one cam-form surface portion 134 of its recess 78, the wedging surface 96 progressively contacts, and is thus forced into progressive wedging engagement, with the braking surface 60. The rotary coupling 10 is therefore progressively locked up, preventing the reverse torque from passing to the driving part 12 and preventing the wheel 68 from turning.

Referring to Figure 2, when the wheel 68 is required to be in a free-wheel 68 state, i.e. when the application of a reverse torque does not cause the rotary coupling 10 to lock up, the lever 102 is operated to move the push-rod element 104 axially to its extended condition. This causes the collar 76 to slide to the second position. This sliding movement results in the coupling members 90 sliding in their respective elongate U-shaped seatings 54 so that the wedging surfaces 96 are now juxtaposed to the secondary annular contact surface 62 of the driving part 12.

15

The outwards axial movement of the push-rod element 104 has the additional effect of torque disengaging the driving shaft 32 and the crown gear 114 of the reduction gearbox 36, due to the movement of the first ball-bearings 116 down the incline of the frusto-conical portion of the push-rod element 104 and out of engagement with the second ball-bearings 120.

20

The wheel 68 can now freely rotate in either direction, regardless of whether the crown gear 114 is being driven. Back-driving of the drivable shaft 64, i.e. applying a net reverse torque, as described above, causes a turning moment to be

imparted to the coupling members 90, whereby the coupling members 90 ride up the base and cam-form surface portions 130 and 134 of the concave recesses 78 and the appropriate thrust surfaces 56 of the U-shaped seatings 54 of the planet carrier 44 into progressive wedging engagement with the secondary annular contact surface 62 of the driving part 12. However, since the driving shaft 32 is torque disengaged from the reduction gearbox 36, any wedging engagement of the coupling members 90 with the secondary annular contact surface 62 simply causes the driving shaft 32 to rotate freely in the bearings 38.

Although a lever mechanism is used for selectively changing the rotary coupling 10 from the first condition in which the transmission of a reverse torque is prevented, to the second condition in which the transmission of a reverse torque is permitted, any suitable actuator mechanism could be utilised.

The rotary coupling having the positive engagement clutch arrangement is not limited to being applied to a wheelchair, and it could easily be adapted for use in numerous other applications. For example, it is particularly suitable for use in a stairlift or gravity-assisted door, such as a fire-door. The inclusion of the reduction gearbox, instead of a worm-drive gearbox, significantly improves efficiency and decreases battery power consumption by the motor.

The positive engagement clutch is not limited to being used in combination with the rotary coupling, and could easily be adapted for use in many other applications.

The first and second engagement members of the positive engagement clutch could be in the form of rollers and/or cylinders, instead of ball-bearings.

5 The first engagement members could also be carried by the crown wheel, and the second engagement members could be carried by the driving shaft. In this case, the actuator would be arranged around the perimeter of the crown wheel.

10 It is thus possible to provide a rotary coupling that, in a first condition, can prevent the transmission of a net reverse torque from the drivable side to the driving side and, in a second condition, allows free rotation in any direction on the application of a net torque to the drivable side. It is also possible to provide a rotary coupling that permits the use of a reduction gearbox, instead of a worm-drive gearbox, while still preventing the possibility of back-drive.

15 It is also possible to provide a simple and progressive positive engagement clutch through which the application of torque transmission can be controlled, and through which a large magnitude of torque can be transmitted without inducing failure. It is also possible to provide a positive engagement clutch which provides feedback to an operator.

20

It is further possible to provide a rotary coupling having a positive engagement clutch, thereby dispensing with the need for a friction clutch.

The embodiment described above is given by way of example only, and

modifications will be apparent to persons skilled in the art without departing from the scope of the invention as defined by the appended claims. For example, it may be possible to carry the coupling members on the drivable part instead of on the driving part; and the coupling members could be moved between the first condition and the
5 second condition in a manner other than by displacement in the direction of the rotational axis of the rotary coupling.

CLAIMS

1. A positive engagement clutch having a torque input side and a torque output side, the clutch comprising a torque input member arranged on the torque input side, a torque output member arranged on the torque output side, first engagement members, second engagement members, and an actuator, the torque input member and the torque output member being arranged concentrically to rotate on a common axis, one of the torque input member and the torque output member carrying the first engagement members, and the other of the torque input member and the torque output member carrying the second engagement members, the first engagement members being radially movable by the actuator between a projecting and a retracted position, and the second engagement members projecting radially into a gap between the torque input member and the torque output member, the first and second engagement members engaging with each other, when the first engagement members are in the projecting position, to progressively engage the torque input and output members to allow the transmission of torque to the torque output side, and the first and second engagement members being disengaged from each other, when the first engagement members are in the retracted position, to prevent the transmission of torque to the torque output side.

20

2. A positive engagement clutch as claimed in claim 1, wherein the first and second engagement members are in the form of ball-bearings.

3. A positive engagement clutch as claimed in claim 1, wherein the first and

second engagement members are in the form of rollers.

4. A positive engagement clutch as claimed in any one of claims 1 to 3, wherein the actuator is in the form of a push-rod element having a frusto-conical portion along which the first engagement members can move to take up the projecting position or the retracted position.

5. A positive engagement clutch as claimed in any one of the preceding claims, wherein the first engagement members are free to move independently of each other.

6. A positive engagement clutch as claimed in any one of the preceding claims, wherein the second engagement members are free to move independently of each other.

7. A positive engagement clutch as claimed in any one of the preceding claims, wherein the first engagement members are carried by the torque output member, and the second engagement members are carried by the torque input member.

8. A rotary coupling comprising a driving part, a drivable part, a fixed part in which the driving and drivable parts are each rotatable coaxially, and a set of coupling members carried by one of the driving and drivable parts for torque-transmitting engagement with the other, the coupling members being selectively positionable so that, in a first condition, the coupling members are juxtaposed to a primary annular contact surface of either the fixed part or the drivable part and, in a second condition,

the coupling members are juxtaposed to a secondary annular contact surface of the driving part, each coupling member being free to move relative to the driving and drivable parts into and out of engagement with the primary and secondary annular contact surfaces, the arrangement being such that, when the coupling members are in the first condition, the application of a first torque on the coupling members causes the coupling members to engage the primary annular contact surface and, when the coupling members are in the second condition, the application of a second torque on the coupling members causes the coupling members to engage the secondary annular contact surface.

10

9. A rotary coupling as claimed in claim 8, wherein the coupling members are moved between the first and second conditions by displacement in the direction of the rotational axis of the rotary coupling.

15

10. A rotary coupling as claimed in claim 8 or claim 9, wherein each coupling member is a roller, the major part of which is cylindrical with a cylinder axis parallel to the rotational axis of the coupling, the cylinder being truncated parallel to its axis to define a wedging surface which faces the adjacent primary and secondary annular contact surfaces, when the coupling members are in the first and second conditions, respectively.

20

11. A rotary coupling as claimed in any one of claims 8 to 10, wherein the coupling members are free to move independently of each other.

12. A rotary coupling as claimed in any one of claims 8 to 11, wherein the primary annular contact surface is a braking surface of the fixed part and the coupling members are carried by the drivable part so that, when the coupling members are in the first condition, a driving torque applied by the driving part to the coupling members is transmitted by the coupling members to the drivable part without engagement of the coupling members with the braking surface, but the said first torque, being a net reverse torque, applied by the drivable part to the coupling members, tends to move the coupling members into wedging engagement with the braking surface so as to lock up the coupling; and, when the coupling members are in the second condition, the said second torque, being the said reverse torque, does not cause the coupling to lock up.

13. A rotary coupling as claimed in claim 12, wherein, when the coupling members are in the second condition, the drivable part is in a free-wheel state.

14. A rotary coupling as claimed in claim 12 or claim 13, wherein the set of coupling members is moved between the first and second conditions by a push-rod actuator coaxial with the driving and drivable parts.

15. A rotary coupling as claimed in any one of claims 12 to 14, wherein the push-rod actuator is manually operable by a lever.

16. A rotary coupling as claimed in any one to claim 12 to 15, wherein the driving part is torque disengageably coupled to a reduction gearbox.

17. A rotary coupling as claimed in claim 16, wherein the reduction gearbox is driven by a battery-operated motor.

18. A rotary coupling as claimed in claim 16 or claim 17, wherein, when the coupling members are in the second condition, the driving part is torque disengaged from the reduction gearbox.

19. A rotary coupling as claimed in any one of claims 12 to 18, wherein the driving part includes a planet carrier coaxial with the driven part, the planet carrier having a plurality of elongate seatings which limit relative circumferential displacement of the coupling members but allow the coupling members to freely move in a radial plane and to move axially between the first and second conditions.

20. A rotary coupling as claimed in any one of claims 12 to 19, wherein each coupling member has an opening, and the drivable part has a pin element which is received in the said opening of the bearing part, the pin element, on application of the said reverse torque to the rotary coupling, aiding movement of the coupling member, when in the first condition, into progressive wedging engagement with the braking surface of the fixed part and, when in the second condition, into progressive wedging engagement with the secondary annular contact surface of the driving part.

21. A rotary coupling as claimed in any one of claims 8 to 20, in combination with a motorised wheel chair.

22. A rotary coupling as claimed in any one of claims 8 to 20, in combination with a gravity-assisted door.

5 23. A rotary coupling as claimed in any one of claims 8 to 22 in combination with a positive engagement clutch as claimed in any one of claims 1 to 7.

24. A positive engagement clutch substantially as hereinbefore described with reference to the accompanying drawings.

10 25. A rotary coupling substantially as hereinbefore described with reference to the accompanying drawings.

26. A combination substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACTROTARY COUPLING

5 A positive engagement clutch has a torque input side 36 and a torque output
side 10. The clutch comprises a torque input member 114 arranged on the torque input
side 36, a torque output member 32 arranged on the torque output side 10, first
engagement members 116, second engagement members 120, and an actuator 104.
The torque input member 114 and the torque output member 32 are arranged
10 concentrically to rotate on a common axis 94. One of the torque input member 114
and the torque output member 32 carries the first engagement members 116, and the
other of the torque input member 114 and the torque output member 32 carries the
second engagement members 120. The first engagement members 116 are radially
movable by the actuator 104 between a projecting and a retracted position, and the
15 second engagement members 120 projecting radially into a gap 126 between the
torque input member 114 and the torque output member 32. The first and second
engagement members 116 and 120 engage with each other, when the first engagement
members 116 are in the projecting position, to progressively engage the torque input
and output members 114 and 32 to allow the transmission of torque to the torque
20 output side 10. The first and second engagement members 116 and 120 are disengaged
from each other, when the first engagement members 116 are in the retracted position,
to prevent the transmission of torque to the torque output side 10.

(Refer to Figure 1)

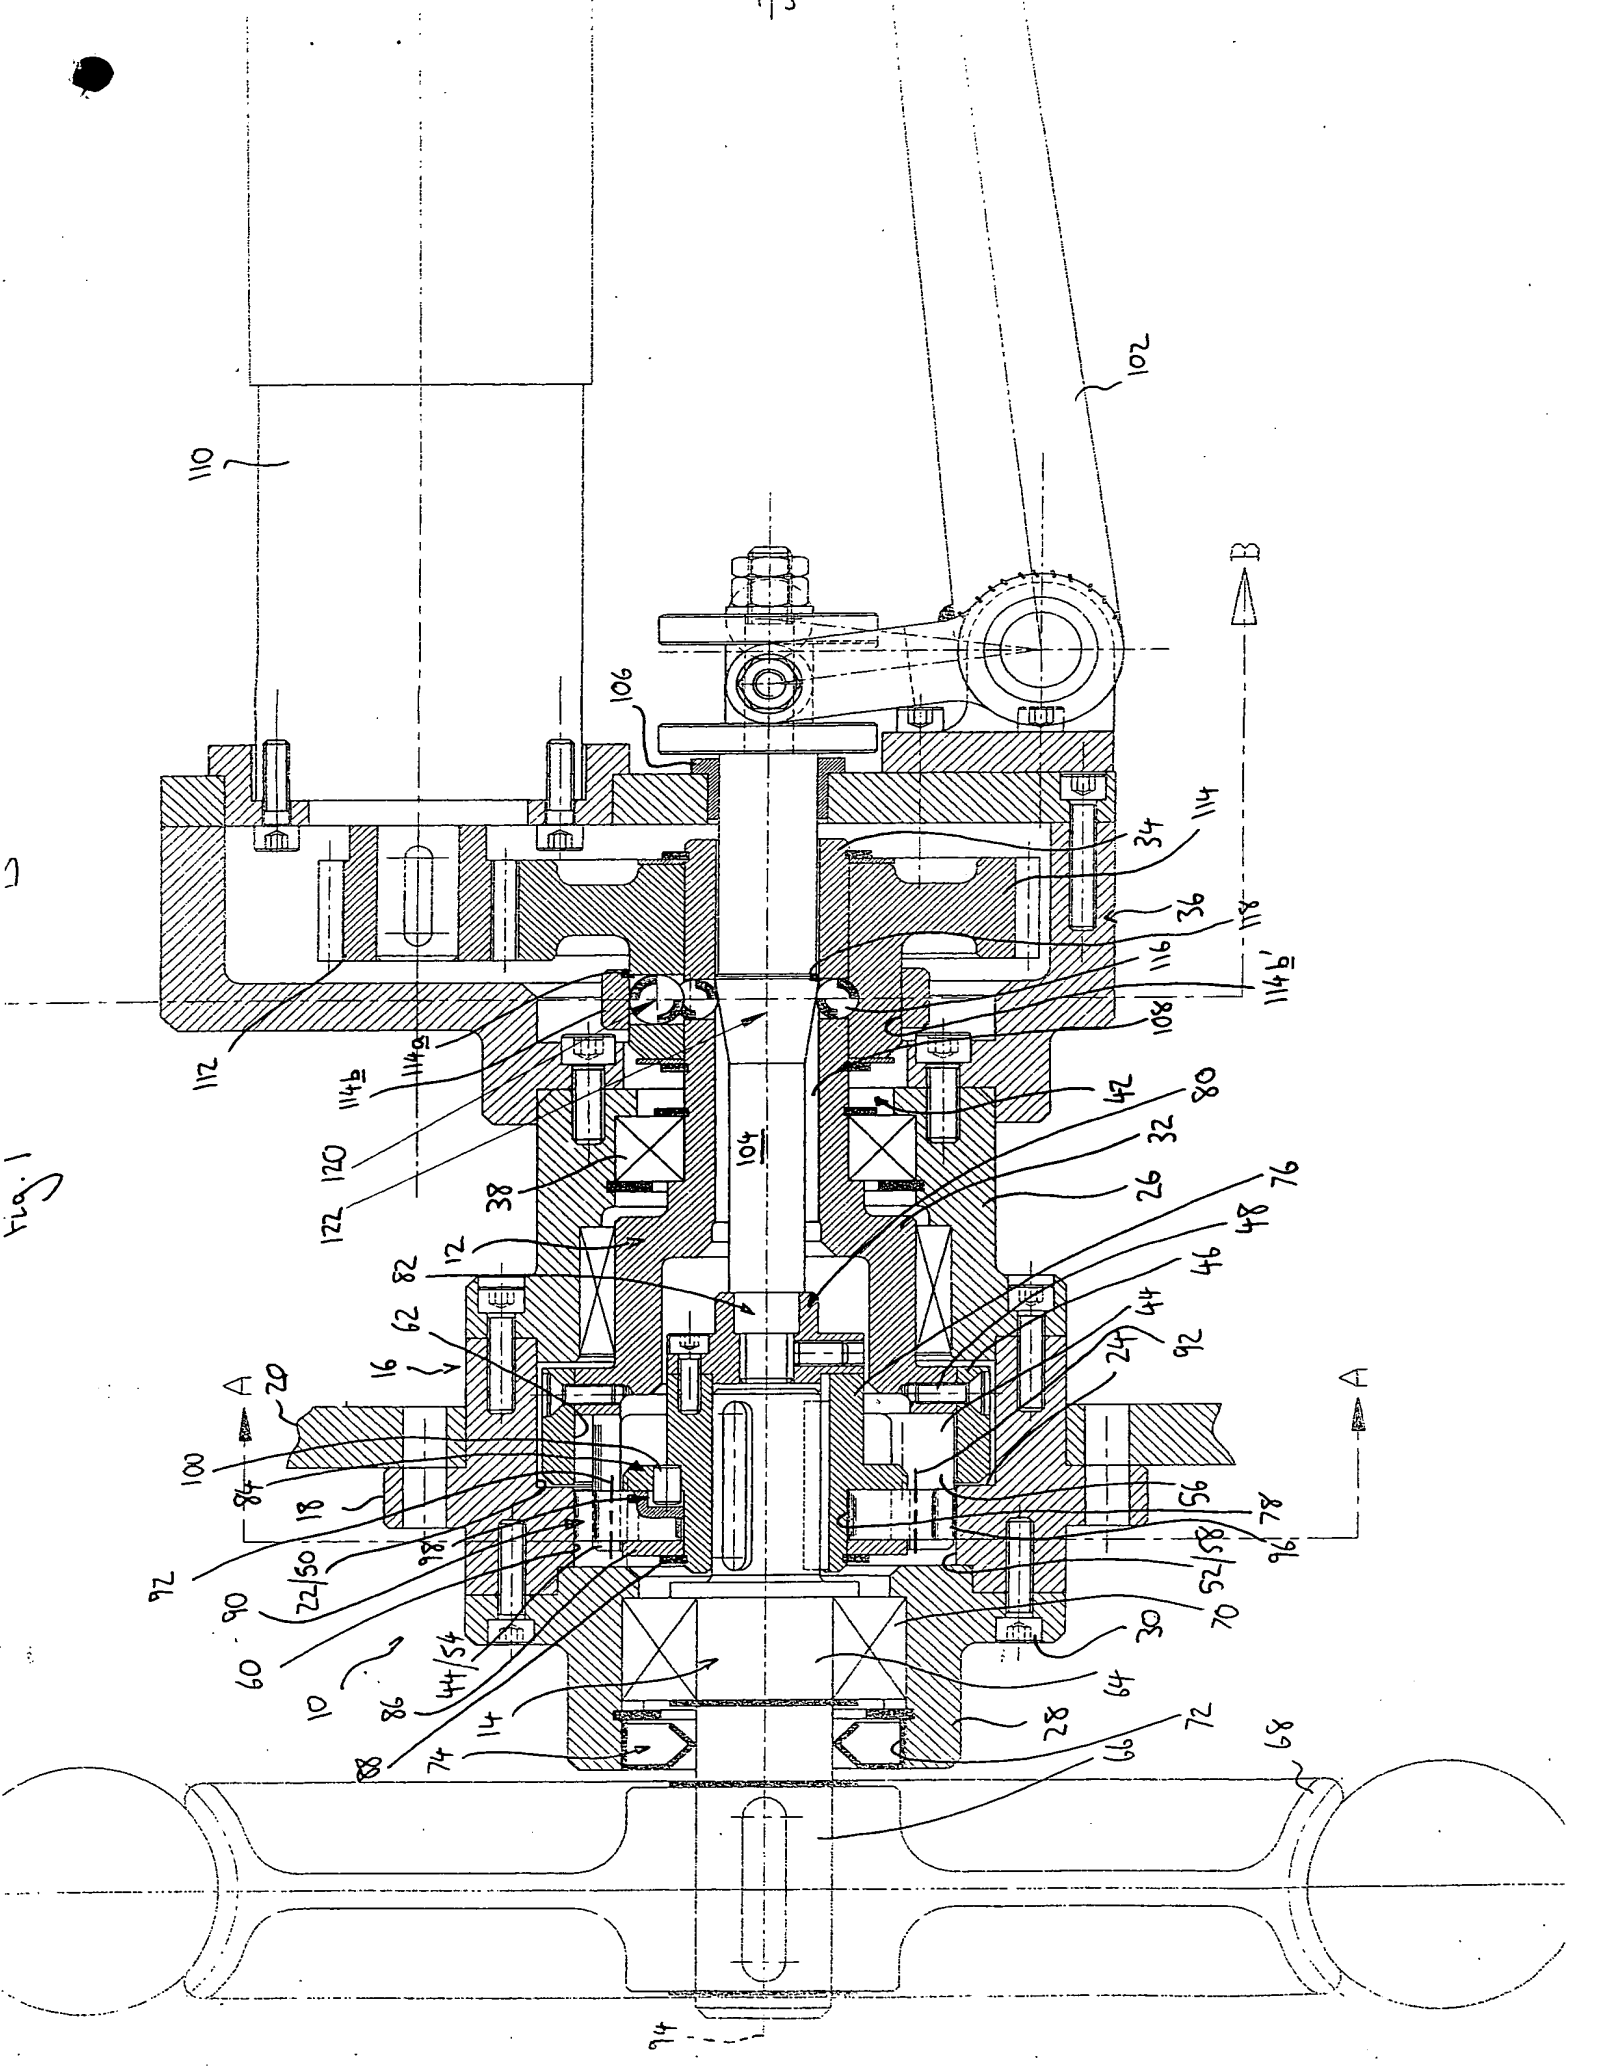


Fig. 1

- 10
- 12
- 14
- 16
- 18
- 20
- 22/50
- 24
- 26
- 28
- 30
- 32
- 34
- 36
- 38
- 40
- 42
- 44
- 46
- 48
- 50
- 52/58
- 54
- 56
- 58
- 60
- 62
- 64
- 66
- 68
- 70
- 72
- 74
- 76
- 78
- 80
- 82
- 84
- 86
- 88
- 90
- 92
- 94
- 96
- 98
- 100
- 102
- 104
- 106
- 108
- 110
- 112
- 114
- 114B
- 114B'
- 116
- 118
- 120
- 122



Fig. 2

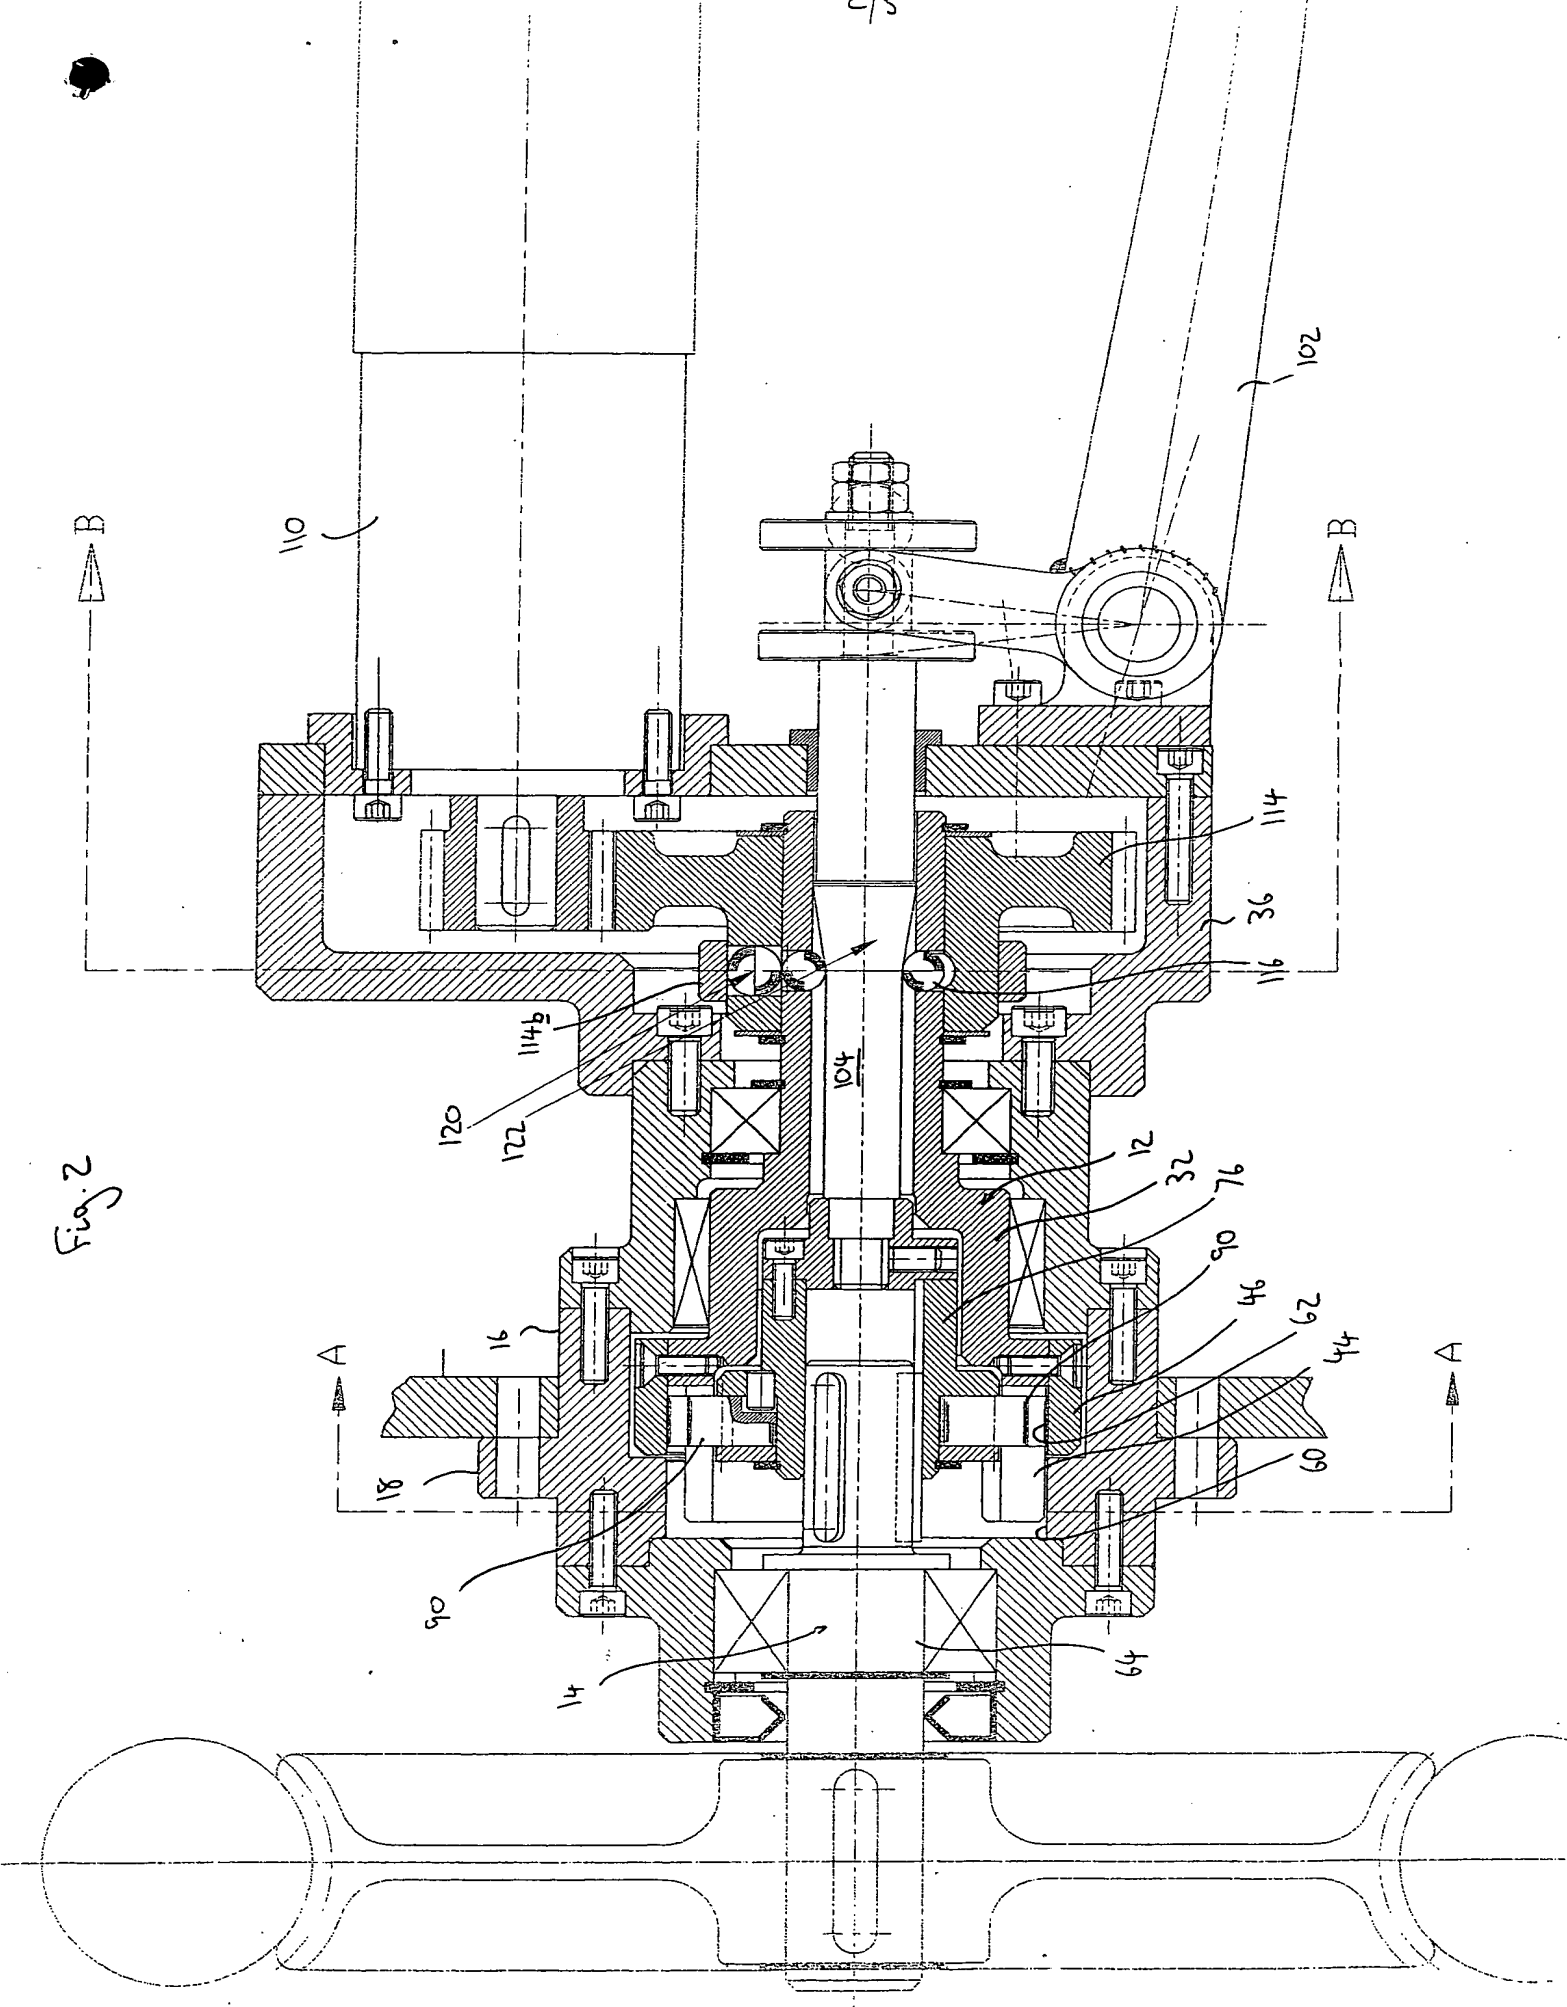


Fig. 3

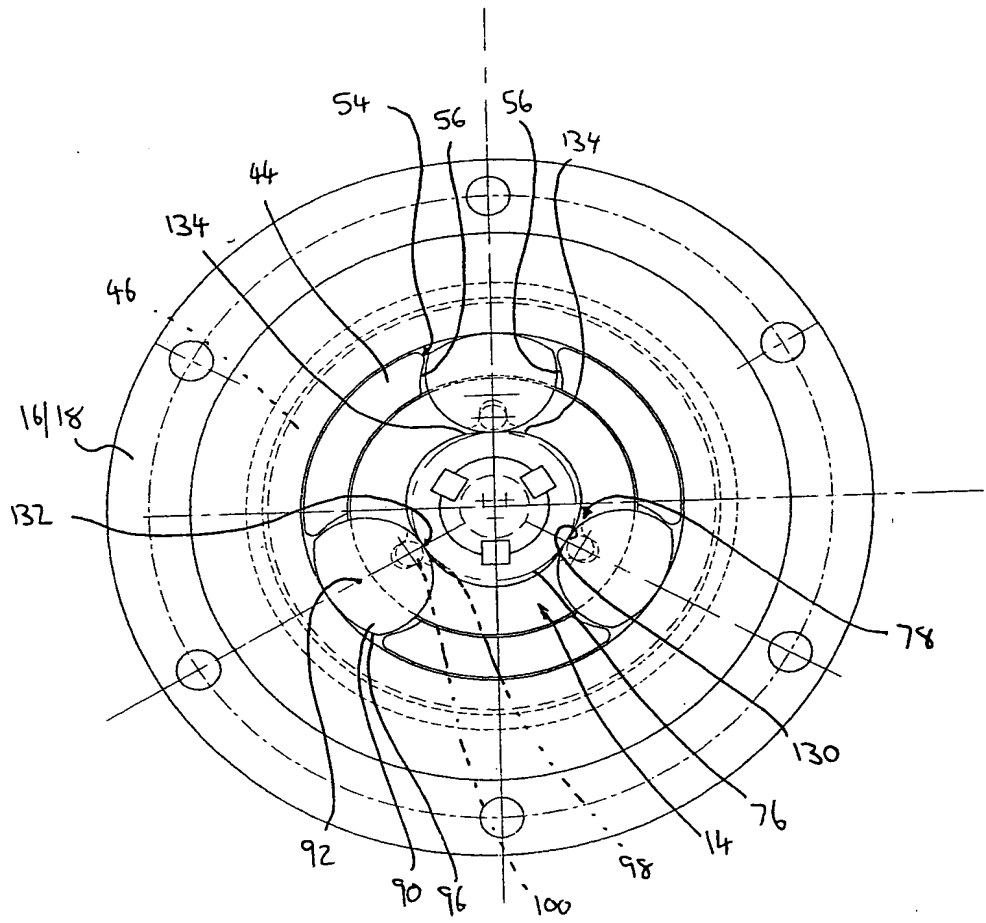


Fig. 4

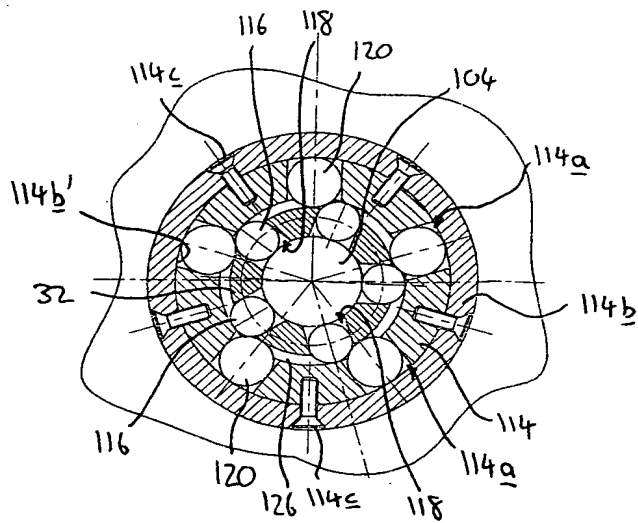


Fig. 5


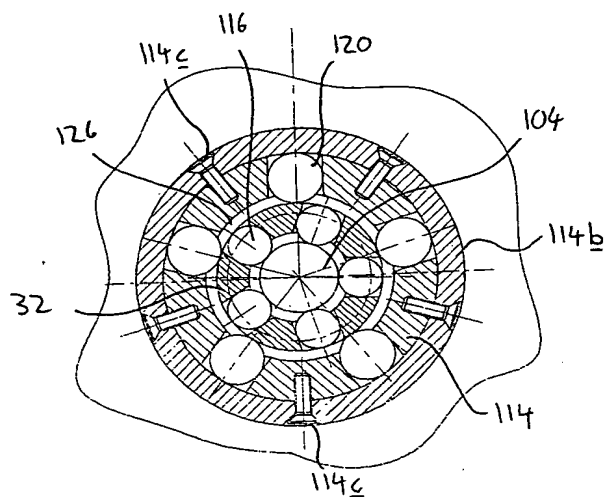




Fig. 6

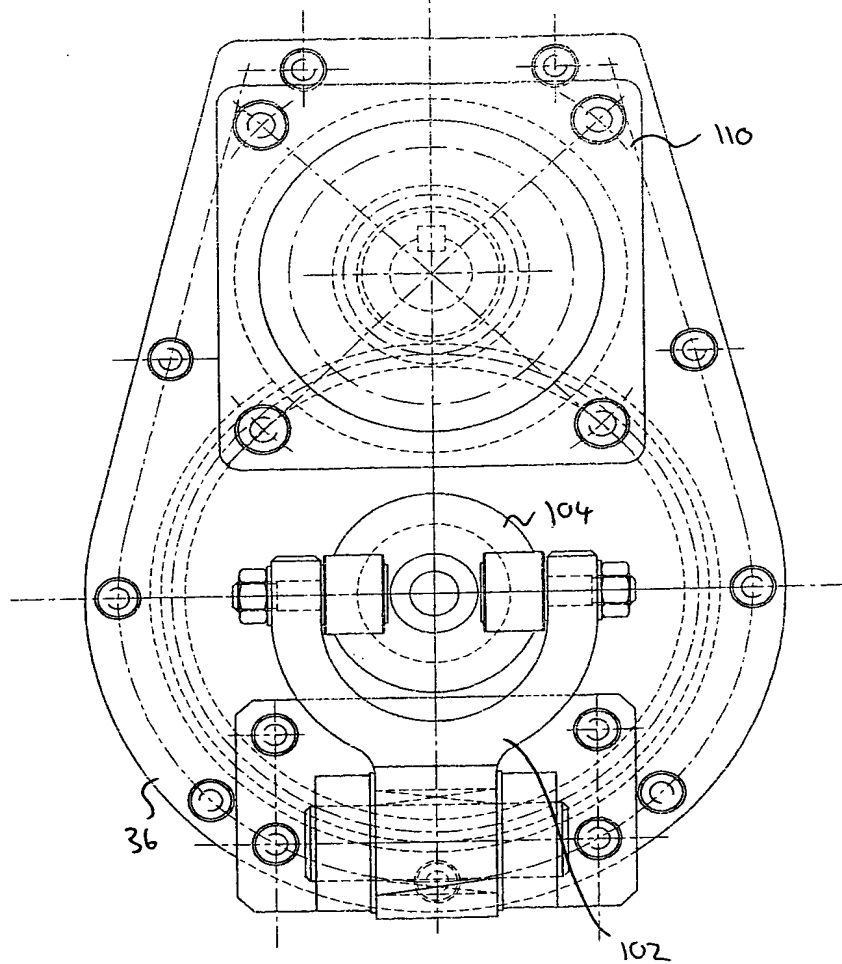

Document Filed By:

Young & Thompson

745 South 23rd Street

Arlington, Virginia 22202

Telephone 703/521-2297

SN 10/776, 218 E-10 Feb. 12, 2004